

WXGA ULTRA SHORT THROW PROJECTOR W319UST



WIDESCREEN WXGA UST PROJECTOR FOR BUSINESS AND EDUCATION



-  **WXGA 3300 lumen ultra short throw projector with 18000:1 contrast ratio**
-  **Large, clear and shadow-free 100" image from 24 inches away**
-  **Extensive connectivity, robust network control, and powerful 16-Watt speaker**
-  **Low total cost of ownership with 6500 hour lamp life**



The Optoma W319UST is a feature-packed WXGA next generation ultra short throw projector for business and education users who demand bright widescreen WXGA projection.

The W319UST sports an impressive ultra bright 3300 lumen image, 18000:1 contrast ratio, powerful 16-Watt speaker and amazing 6500-hour lamp life. With a powerful WXGA throw ratio of 0.27, the W319UST allows for a 100" image from only 24 inches away.

The W319UST is flexible and robust providing full network control support for popular management suites such as Crestron and PJ Link, along with support for RS-232C and Telnet-based commands. The 16-Watt speaker is crisp and clear, enhancing the effectiveness of presentations containing audio while the ECO+ power mode yields an impressive 6500 hours of lamp life.

CONNECTIVITY (May require optional accessories)



Computers



Smart Phones



Tablets



3D Blu-ray/DVD Players



Camcorders



Digital Cameras



Apple TV®



Chromecast™

WXGA ULTRA SHORT THROW PROJECTION — W319UST

OPTICAL/TECHNICAL SPECIFICATIONS


Display Technology	Single 0.65" DC3 DMD DLP® Technology by Texas Instruments™
Native Resolution	WXGA (1280x800)
Maximum Resolution	WUXGA (1920 x 1200)
Brightness	3300 ANSI Lumens
Contrast Ratio	18000:1
Displayable Colors	1.07 Billion
Lamp Life*	3000/5000/5000/6500 Hrs (Bright/ECO/Dynamic/ECO+)
Projection Method	Front, rear, ceiling mount, table top
Keystone Correction	±40° Vertical
Uniformity	85%
Offset	115%
Aspect Ratio	16:10 (native), 4:3, 16:9
Throw Ratio	0.27:1 (distance/width) - +-5% Variance
Projection Distance	19.1"– 25.8" (0.485m – 0.656m)
Image Size (Diagonal)	85"–115"
Projection Lens	F/2.4; f=3.72 mm, Fixed Zoom
Optical Zoom	Fixed
Digital Zoom	Fixed
Audio	16W Mono Speaker
Noise Level	Min 29dB–Max 36dB
Remote Control	Full Function IR Remote with Laser
Operating Room Temperature	41–104°F (5–40°C), 85% max humidity
Power Supply	AC input 100–240V, 50–60Hz, auto-switching
Power Consumption	350W MAX Bright Mode / 300W MAX Eco mode (<0.5W Standby)
High Altitude	Operating Temp @ Sea Level to 10000 feet = 23C (max); MUST manually switch to high altitude mode @ 5000 feet & above (using OSD) to maintain optimal functionality

COMPATIBILITY SPECIFICATIONS

Computer Compatibility	WUXGA, UXGA, SXGA, WXGA, HD, XGA, SVGA, VGA, Mac
Video Input Compatibility	PAL (B, D, G, H, I, M, N, 576i/p), NTSC (M, 4.43/3.58 MHz, 480i/p), SECAM (B, D, G, K, K1, L) HD (1080i, 720p)
3D Compatibility¹	Supports all HDMI 1.4a mandatory 3D formats (Frame pack, side-by-side, top-bottom) and up converts frame rate from 60Hz to 120Hz or 24Hz to 144Hz (i.e 60 or 72 frames per eye). 3D glasses are needed and are sold separately. Refer to user manual for details.
Vertical Scan Rate	24–85Hz (120Hz for 3D)
Horizontal Scan Rate	15.3–91.1kHz
User Controls	Complete on-screen menu, adjustments in 25 languages
I/O Connection Ports	2x HDMI (1.4a 3D support), 3D-Sync Port Out, VGA1-In (YPbPr/RGB), VGA2-In/VGA-Out (shared), Composite Video, Audio1-In (analog RCA), Audio2-In (3.5 mm), Audio-Out (3.5 mm), RJ45, RS-232C, mini USB (remote mouse/service), 12V trigger, Mic, USB-A (power)
Epson Arm Mount Compatibility	Adapter Plate for Epson UST Arm Mount (Part# EWMA2000)
Promethean Arm Mount Compatibility	Adapter Plate for Epson UST Arm Mount (Part# BM-4001P)
Loop Through (Audio)	Yes

PHYSICAL SPECIFICATIONS

Security	Kensington® lock port, security bar and keypad lock
Weight	10.53 lb (4.78 kg)
Dimensions (W x H x D)	15.15" x 4.72" x 12.20" (385 x 120 x 310 mm)

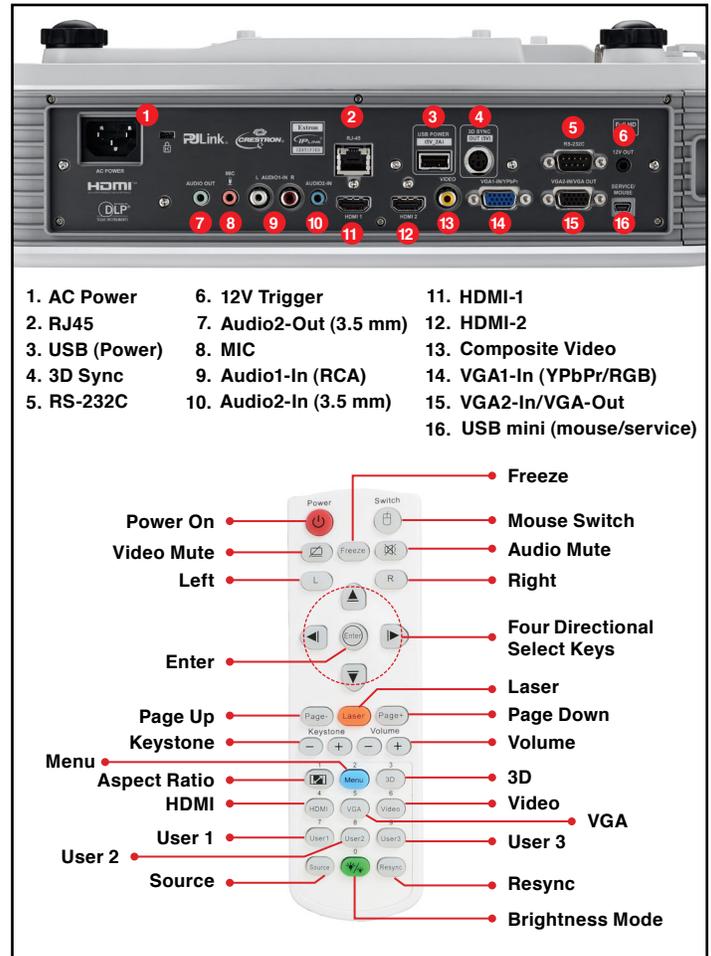

- | | | |
|----------------|------------------------|------------------------------|
| 1. AC Power | 6. 12V Trigger | 11. HDMI-1 |
| 2. RJ45 | 7. Audio2-Out (3.5 mm) | 12. HDMI-2 |
| 3. USB (Power) | 8. MIC | 13. Composite Video |
| 4. 3D Sync | 9. Audio1-In (RCA) | 14. VGA1-In (YPbPr/RGB) |
| 5. RS-232C | 10. Audio2-In (3.5 mm) | 15. VGA2-In/VGA-Out |
| | | 16. USB mini (mouse/service) |

Warranty

3-Year Optoma Express Service, 1-Year on Lamp

What's in the Box

W319UST projector, AC power cord, VGA cable, USB cable, remote control, batteries, quick start card, CD user manual

Optional Accessories

Lamp, Remote, Wireless HDMI solution, Wireless VGA adapter, VGA to Component adaptor, RF 3D Glasses, DLP® Link™ 3D glasses, RF 3D emitter, Adapter plate for Epson arm mount, Adapter plate for Promethean arm mount, Optoma ceiling mount

Accessory Part Numbers

Lamp: SP.72701GC01	Remote: SP.72702GC01
Wireless HDMI Solution: WHD200	Wireless VGA Adapter: BI-EXTBG03
VGA to component adaptor: BC-VGCRXY00	RF 3D glasses: ZF2300GLASSES
DLP® Link™ 3D glasses: ZD302	RF 3D emitter: BC300
Adapter plate for Epson arm mount: EWMA2000	Optoma Wall mount: OWM2100
Adapter plate for Promethean arm mount: BM-4001P	

UPC 796435 41 989 9

¹Lamp life is dependent on many factors, including lamp mode, display mode, usage, environmental conditions and more. Lamp brightness can decrease over time.

²3D content can be viewed with either RF or DLP Link active shutter 3D glasses when projector is used with a compatible 3D player. RF 3D glasses require the use of an RF 3D emitter and a projector with a 3D VESA Sync port. Please visit www.OptomaUSA.com for more information.

www.OptomaUSA.com



Copyright © 2016 Optoma Technology, Inc. DLP® and the DLP logo are registered trademarks of Texas Instruments™. All other trademarks are the property of their respective owners. All specifications subject to change at any time.